

50 SERIES

NYLOFFORD

Product description

One component ink for screen printing on sheets and pieces of nylon, certain treated polyesters and polyamides.

50 SERIES give in all these materials a hard, flexible and well adhered film, with high resistance to bending and to washing.

Recommended applications:

Sheets and pieces of nylon, treated polyesters, polyamides and varnished leather.

Finish:

Gloss.

Presentation:

Only viscosity needs to be adjusted, depending on the job, factory temperature and impression speed.

Diluents:

D-200 as fast to normal and D-696 as normal to slow. Its adequate mixture gives a good behaviour in the screen and short drying periods, in the order of 5 to 20 minutes when exposed to the air, depending on the material and the job, and in seconds if it is passed through a tunnel.


Screens:

Emulsion with ARGAZOL-E (easy decoating) or ARGAZOL-UV (high performance and definition) with meshes from 90 to 130 meshes/cm.

Security:

Carefully read the label directions and the tab Security of this ink.

Colors

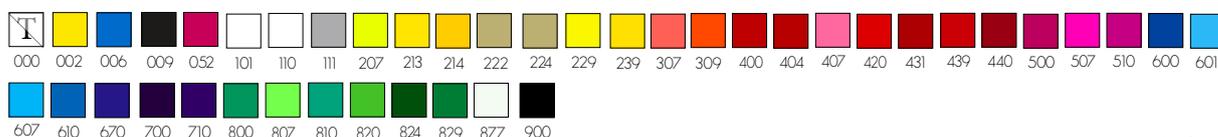

11/2015

The information supplied is a result of our updated knowledge; it is supplied with good intention but under no circumstances it can be taken as a guarantee. Moreover, taking into account the great diversity of printable materials, the diversity of machinery and procedures to carry out the jobs, it is the user's responsibility to check the suitability of our products to obtain the objectives he desires, with the resources and procedures he has. The user must also make sure he complies with the current legislation, situation of patents and third party rights when applicable.