

88 SERIES

FLEXICURE

Product Description

U.V. curable ink to be applied by screen printing, specially designed for the impression of PVC and metacrylates. Its main features are its high gloss, relatively fast curing, high flexibility and good surface finishing.

Recommended applications:

PVC, metacrylates, papers and cardboards.

Drying:

Under a 80 W lamp, it passes the talc test at speeds of around 35 to 40 m/min.

Finish:

Gloss.

Screens:

Emulsion ARGAZOL-UV (with meshes from 150 to 165 meshes/cm).


Presentation:

It is ready for use with viscosities of 150 to 165 meshes at 20°C.

Security:

Carefully read the label directions and the tab Security of this ink.

Colors

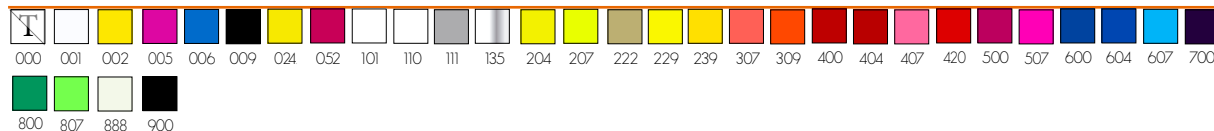

Any other colour can be supplied on demand.

11/2015

The information supplied is a result of our updated knowledge; it is supplied with good intention but under no circumstances it can be taken as a guarantee. Moreover, taking into account the great diversity of printable materials, the diversity of machinery and procedures to carry out the jobs, it is the user's responsibility to check the suitability of our products to obtain the objectives he desires, with the resources and procedures he has. The user must also make sure he complies with the current legislation, situation of patents and third party rights when applicable.